

BL Series of LED Bargraph Indicator Device

BL10-2712SA10

BL10-2712SK10

10 Segments 26.6mm LED Indicator

BL

S



BL10-2712SX10-E100



BL10-2712SX10-N200



BL10-2712SX10-Y400

Description

The BL series of LED Bargraph display, using high brightness LED chips and semiconductor encapsulations processing technology, is the ideal display device to replace moving coil indicators. Widely used in electronic display meters and instruments. The feature is as follows.

Features

- The use of sub-block scattering techniques, wide angle of view
- Clearly display, uniform brightness
- Antimagnetic, aseismatic, impact resistance
- High reliability, maximum mean life

Absolute Maximum Rating ($T_A=25^\circ\text{C}$)

	Symbol	Min.	Typ.	Max.	Units
Peak forward current	I_F	20	50	100	mA
Reverse voltage	V_R		5		V
Power dissipation	P_W		0.2 (F.S.)	0.3	W
Operating temperature range	T_J	-25		70	$^\circ\text{C}$
Storage temperature range	T_{Stg}	-40		85	$^\circ\text{C}$
Soldering time at 260°C			3 sec		

Electro-optical Characteristics ($T_A=25^\circ\text{C}$)



	Symbol	Red (E100)	Yellow (Y400)	Emerald (N200)	Test condition
Peak wavelength	λ_P	625nm	590nm	510nm	$I_F=20\text{mA}$
Segment brightness	I_V	100mcd	400mcd	200mcd	$I_F=20\text{mA}$
Forward voltage	V_F	2.0V	2.0V	3.2V	$I_F=20\text{mA}$

[Http://www.barmeter.com](http://www.barmeter.com)


[Http://www.barmeter.com](http://www.barmeter.com)

[Http://www.barmeter.com](http://www.barmeter.com)

Dimension and Circuit

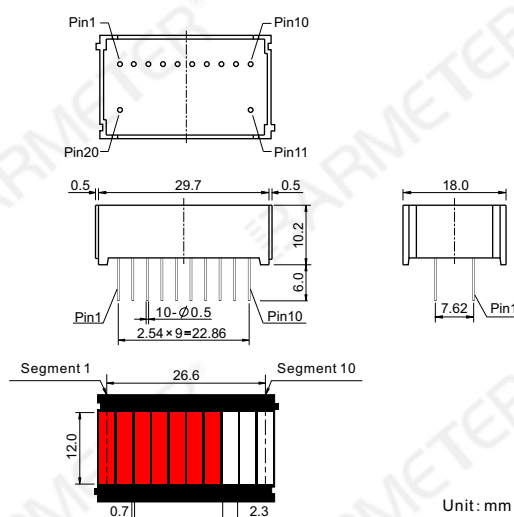

BL10-2712SA10



BL10-2712SK10

Pin Definition

Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	C									C